


船用搭焊钢法兰(四进位) GB 2506-89
Marine lap welded steel flanges(quaternary)

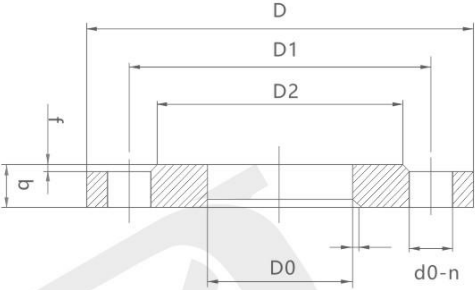

公称 压力 PN Mpa	公称 通径 DN	管子外径DW		法兰				密封面		焊缝高 度与倒 角边宽 k	端距 h	螺栓螺纹及通孔			重量 kg	
		第一 系列	第二 系列	D	D1	D0	b	D2	f			Th.	d0	n(个)		
0.25、 0.6	10	17.2	17	75	50	18	12	35	2	3	4	M10	11	4	0.31	
	15	21.3	22	80	55	23	14	40							0.35	
	20	26.9	27	90	65	28	14	50							0.53	
	25	33.7	34	100	75	35	14	60							0.64	
	32	42.4	42	120	90	43	16	70	3	4	5	M12	14	4	1.08	
	40	48.3	48	130	100	49		80							1.19	
	50	60.3	60	140	110	61		90							1.31	
	65	76.1	76	160	130	77.5		110							1.64	
	80	88.9	89	190	150	90.5	18	128	3	5	6	M16	18	8	2.01	
	100	114.3	114	210	170	116		148							3.71	
	125	139.7	140	240	200	142		178							3.90	
	150	168.3	168	265	225	170		202							4.32	
	175	193.7	194	295	255	196	232	22	258	5	6	M16	18	8	5.82	
	200	219.1	219	320	280	221.5	258								6.31	
	225	-	245	345	305	248	282								6.85	
	250	273	375	335	276.5	312	24								312	8.43
	300	323.9	325	440	395	328.5	365	4	520	6	7	M20	22	16	10.60	
	350	355.6	377	490	445	360 381	26								415	15.47
	400	406.4	426	540	495	410 430	28								465	18.48
450	457	480	595	550	462 485	30	520								23.03	
0.25	500	508	530	645	660	513 535	30	570	5	8	9	M24	26	20	24.05	
	600	610	630	755	705	615 635	32	670							20	
	700	711	-	860	810	-	32	775							-	
	800	813	-	975	920	-	34	880							-	
	900	914	-	1075	1020	-	36	980	5	9	10	M27	30	28	-	
	1000	1016	-	1175	1120	-	36	1080							32	
	1200	1220	-	1375	1320	-	44	1280							36	
	1400	1420	-	1575	1520	-	48	1480							40	
	1600	1620	-	1790	1730	-	55	1690	11	12	13			44		
	1800	1820	-	1990	1930	-	60	1890						48		
	2000	2020	-	2190	2130	-	66	2090						-		

公称 压力 PN Mpa	公称 通径 DN	管子外径DW		法兰				密封面		焊缝高 度与倒 角边宽 k	端距 h	螺栓螺纹及通孔			重量 kg
		第一 系列	第二 系列	D	D1	D0	b	D2	f			Th.	d0	n(个)	
0.6	600	610	630	755	705	615 635	38	670	5	8	9	M24	26	20	38.71
	700	711	-	860	810	-	42	775						24	-
	800	813	-	975	920	-	46	880						28	-
	900	914	-	1075	1020	-	50	980						32	-
	1000	1016	-	1175	1120	由用户 提供	56	1080		10	11	M30	33	36	-
	1200	1220	-	1405	1340	-	64	1295						40	-
	1400	1420	-	1630	1560	-	76	1510						36	-
	1600	1620	-	1830	1760	-	84	1710						44	-
1.0、 1.6	1800	1820	-	2045	1970	-	94	1920	2	12	13	M36	39	44	-
	10	17.2	17	90	60	18	14	42		3	4	M12	14	4	0.53
	15	21.3	22	95	65	23	14	47							0.59
	20	26.9	27	105	75	28	16	58							0.84
	25	33.7	34	115	85	35	16	68		4	5	M16	18	8	1.09
	32	42.4	42	140	100	43	18	78							1.81
	40	48.3	48	150	110	49	18	88							2.05
	50	60.3	60	165	125	61	20	102		5	6	M20	22	8	2.42
	65	76.1	76	185	145	77.5	22	122							2.96
	80	88.9	89	200	160	90.5	22	133		6	7	M24	26	12	3.21
	100	114.3	114	220	180	116	24	158							4.01
	125	139.7	140	250	210	142	26	184		7	8	M27	30	16	4.90
	150	168.3	168	285	240	170	26	212							6.50
	175	193.7	194	315	270	196	28	242		8	9	M30	33	20	7.72
	200	219.1	219	340	295	221.5	30	268							8.53
1.0	225	-	245	370	325	248	30	295		9	10	M33	36	24	9.73
	250	273	395	350	276.5	320	32	320							10.94
	300	323.9	325	445	400	328.5	34	370		10	11	M36	39	28	12.31
	350	355.6	377	505	460	360 381	36	430							19.02
	400	406.4	426	565	515	410 430	38	482		11	12	M40	42	32	25.95
	450	457	480	615	565	462 485	40	532							31.01
	500	508	530	670	620	513 535	42	585		12	13	M45	48	36	38.27
	600	610	630	780	725	615 635	44	685							59.36
	200	219.1	219	340	295	221.5	26	268	3	6	7	M20	22	12	9.06
	225	-	245	370	325	248	27	295							10.76
	250	273	395	350	276.5	320	29	320		7	8	M24	26	16	13.21
	300	323.9	325	460	410	328.5	32	370							17.40
	350	355.6	377	520	470	360 381	34	430		8	9	M27	30	20	27.91
	400	406.4	426	580	525	410 430	40	482							35.92
	450	457	480	640	585	462 485	46	532		9	10	M30	33	24	48.33
	500	508	530	715	650	513 535	52	585							69.15
1.6	600	610	630	840	770	615 635	60	685		10	11	M33	36	28	105.35